


NA5PLUS - DIGITAL METER WITH BARGRAPH

- 3 or 7-colour bargraph with programmable colour switching over.
- Logging of the measured signal in programmed time intervals (800 samples).
- Universal measuring input.
- Programmable indication characteristic (21-point rescaling) and bargraph magnifier.
- Up to 8 programmable alarm outputs.
- Alarm triggered by the rate of change of the measured signal over time.
- Arithmetical functions x^2 , $\sqrt{x}$.
- Communication in SCADA systems (RS485/Modbus interfaces).
- Conversion of any measured value into a current or voltage analog signal.



EXAMPLE OF APPLICATION

Measurement of pressure in a pipeline.

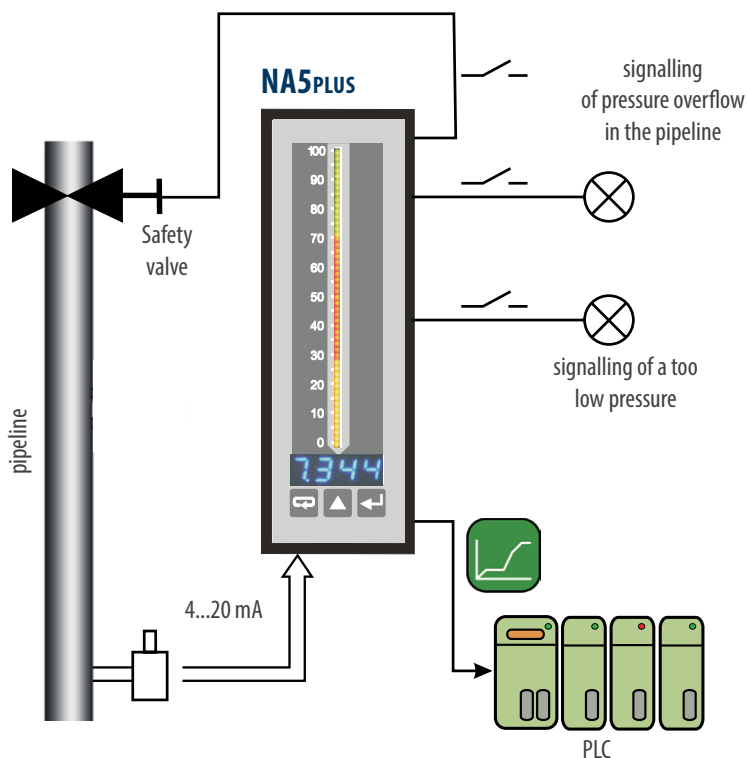

FEATURES	INPUTS	OUTPUTS	GALVANIC ISOLATION

TECHNICAL DATA

INPUTS

Input type	Measurement range	Basic error	Additional error
Pt100	-200...850°C	0.1%	compensation of temperature changes of reference welds ≤ ±1°C compensation of cable resistance changes - when changing the resistance of wires < 10 Ω the error is ≤ ±0.5°C - when changing the resistance of wires < 20 Ω the error is ≤ ±1°C
Pt500	-200...850°C		
Pt1000	-200...850°C		
J (Fe-CuNi)	-100...1100°C		
K (NiCr-NiAl)	-100...1370°C		
N (NiCrSi-NiSi)	-100...1300°C		
E (NiCr-CuNi)	-100...850°C	0.2%	change in ambient temperature ≤ ± 0.1% of the range
R (PtRh13-Pt)	0...1760°C		
S (PtRh10-Pt)	0...1760°C		
T (Cu-CuNi)	-50...400°C	0.1%	
Resistance	0...5 kΩ		
Voltage	± 75 mV, R _{imp.} > 100 kΩ ± 300 mV, R _{imp.} > 100 kΩ ± 0...600 V, R _{imp.} > 3.5 MΩ		
Current	± 40 mA, R _{imp.} < 4 Ω ± 5 A, R _{imp.} = 10 mΩ ± 10%		

Intensity of current flowing through the resistance thermometer: $< 400\text{ }\mu\text{A}$
Resistance of wires connecting the resistance thermometer with the meter: $< 20\Omega/1\text{ wire}$

OUTPUTS

Output type	Features
Current analog output	1 or 2 programmable 0/4...20 mA; load resistance $\leq 500\Omega$
Voltage analog output	1 or 2 programmable 0-10 V; load resistance $\geq 500\Omega$
Relay output	4 relays; NOC voltageless contacts, maximal load: - voltage: 250 V a.c., 150 V d.c. - current: 5 A 30 V d.c., 250 V a.c. - resistive load: 1250 VA, 150 W
Open collector (OC) type	8 outputs of OC type: maximal load: - voltage: 5...30V d.c. - current: 25mA d.c.
Digital interface	interface type: RS-485; transmission protocol: MODBUS, RTU (8N2, 8E1, 8O1, 8N1) baud rate: 2400, 4800, 9600, 19200, 57600, 115200 b/s
Additional supply output	24 V d.c., maximal load 30 mA

EXTERNAL FEATURE

Readout field	4 - digits LED display	7-segment digits of 7 mm high, measuring range -1999...9999
	bargraph	bargraph of 100 mm length: - 55 segments in three-colour version - 28 segments in seven-colour version Bargraph resolution: programmable
Overall dimensions	48 x 144 x 100 mm	
Weight	$< 0.4\text{ kg}$	panel cut-out: 44+0.5 x 137.5+0.5 mm
Protection grade (acc. to EN 60529)	from frontal side: IP50	from terminal side: IP20


RATED OPERATING CONDITIONS

Supply voltage	95...253 V a.c. 40...400 Hz; 90...300 V d.c. 20...40 V a.c. 40...400 Hz, 20...60 V d.c.	power consumption $\leq 13\text{ VA}$
Temperature	ambient: -10...23...55°C	storage: -25...85°C
Relative humidity	$< 95\%$	Condensation inadmissible

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Pollution grade	2	acc. to EN 61010-1
Installation category	III	
Maximal phase-to-earth operating voltage	• for input circuit: 600 V • for supply circuit: 300 V • for other circuits: 50 V	
Altitude above sea level	$< 2000\text{ m}$	

ELECTRICAL CONNECTIONS

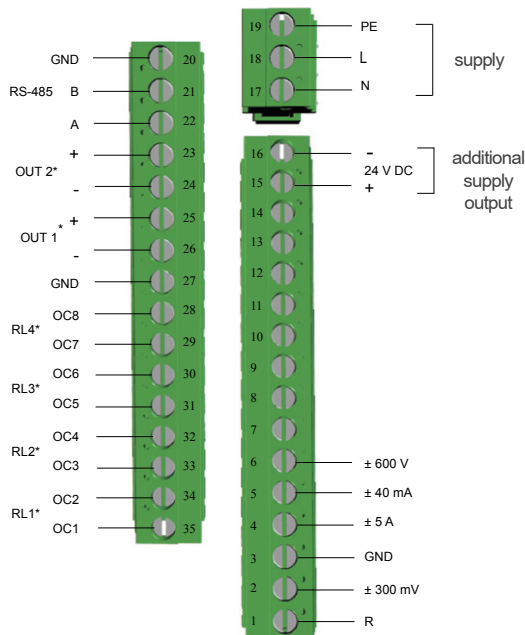

*-optional elements depend on the meter's version

Fig. 1 Description of the terminal strip.





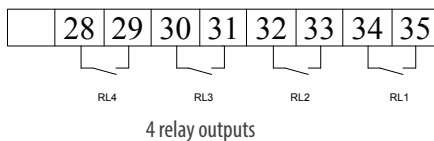








Fig.3. Connection way of output signals depending on the execution code.

Fig. 2 Connection way of input signals.

ORDERING

NA5PLUS -	X	X	X	X	X	X	XX	X	X
Bargraph colour:									
3-colour (R, G, R+G)	T								
7-colour (R, G, B, R+G, R+B, G+B, R+G+B)	M								
Display colour:									
red	R								
green	G								
custom-made*	X								
Input signal:									
universal input		U							
custom-made*		X							
Analog output:									
lack			0						
0/4...20mA			1						
0...10 V			2						
2 x 0/4...20 mA			3						
2 x 0...10 V			4						
1 x 0/4...20 mA, 1 x 0...10 V			5						
Additional output:									
lack			0						
4 relays			4						
8 outputs of OC type			8						
Supply voltage:									
95...253 V a.c./d.c.			2						
20...40 V a.c., 20...60 V d.c.			4						
Version:									
standard				00					
custom-made*				XX					
Language:									
Polish					P				
English					E				
other*					X				
Acceptance tests:									
without extra requirements						0			
with an extra quality inspection certificate						1			
acc. to customer's request							X		

Ordering example:

The code **NA5PLUS- TGU18200E0** means:

NA5PLUS - NA5PLUS meter

T - bargraph RG

G - green display colour

U - universal inputs

1 - current output 0/4...20 mA

8 - 8 outputs of OC type

2 - supply 95...253V a.c./ 90...300 V d.c.

00 - standard version

E - english version

0 - without extra requirements

* - after agreeing with the manufacturer

For more information about Lumel products
please visit our website:

www.lumel.com.pl



Join us at Facebook!



NA5Plus19_en



LUMEL
EVERYTHING COUNTS

LUMEL S.A.

ul. Sulechowska 1, 65-022 Zielona Góra, POLAND
tel.: +48 68 45 75 100, fax +48 68 45 75 508
www.lumel.com.pl

Export department:

tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386
fax.: (+48 68) 32 54 091
e-mail: export@lumel.com.pl